



Your supplier



The right battery

GACELL A/S · Sletten 17 · 7500 Holstebro · DK
+45 961 02 961 · www.gacell-power.dk

CBHF2-PFC

Main features:

Active PFC


Metal case with handle

Portable design

STAND-ALONE application

APPLICATIONS



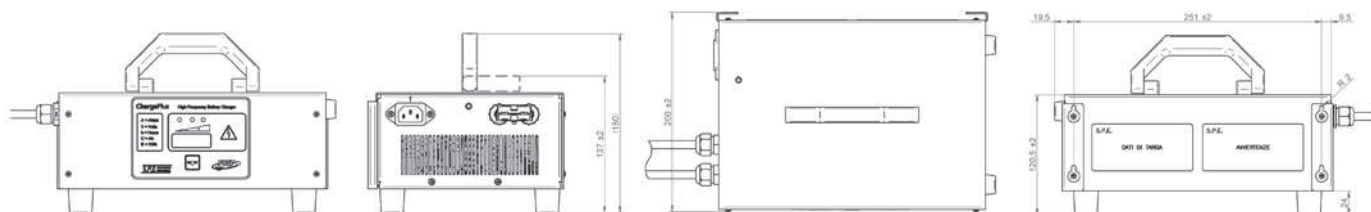

DIMENSIONS (LxWxH): 280x200x137 mm – 11.02x7.87x5.39 in

WEIGHT: 5 Kg - 11.02 lbs

PROTECTION GRADE IP30

INPUT VOLTAGE: Universal 100 ÷ 240 Vac – 50-60 Hz

Battery Voltage	Battery Range (5h)		Battery Range (20h) 10-12 hours charging time	Charging Current	Model
	8-9 hours charging time	10-12 hours charging time			
12V	80 ÷ 110 Ah	100 ÷ 150 Ah	130 ÷ 185 Ah	15A	12-15
	95 ÷ 120 Ah	120 ÷ 195 Ah	150 ÷ 240 Ah	20A	12-20
	120 ÷ 160 Ah	180 ÷ 260 Ah	220 ÷ 315 Ah	25A	12-25
	145 ÷ 180 Ah	200 ÷ 280 Ah	245 ÷ 350 Ah	30A	12-30
24V	80 ÷ 110 Ah	100 ÷ 150 Ah	130 ÷ 185 Ah	15A	24-15
	95 ÷ 120 Ah	120 ÷ 195 Ah	150 ÷ 240 Ah	20A	24-20
	120 ÷ 160 Ah	180 ÷ 260 Ah	220 ÷ 315 Ah	25A	24-25
	145 ÷ 180 Ah	200 ÷ 280 Ah	245 ÷ 350 Ah	30A	24-30
36V	80 ÷ 110 Ah	100 ÷ 150 Ah	130 ÷ 185 Ah	15A	36-15
	95 ÷ 120 Ah	120 ÷ 195 Ah	150 ÷ 240 Ah	20A	36-20
	120 ÷ 160 Ah	180 ÷ 260 Ah	220 ÷ 315 Ah	25A	36-25
48V	80 ÷ 110 Ah	100 ÷ 150 Ah	130 ÷ 185 Ah	15A	48-15
	95 ÷ 120 Ah	120 ÷ 195 Ah	150 ÷ 240 Ah	20A	48-20

