

## EDC12-135 (12V 140Ah)

### Specifications

Nominal Voltage	12V	
Nominal Capacity(20 Hr)	140Ah	
Dimension	Length	341±1mm( 13.43 inches)
	Width	173±1mm( 6.81 inches)
	Container Height	283±1mm( 11.14 inches)
	Total Height (With terminal)	288±1mm( 11.34 inches)
	Approx Weight	Approx40.8kgs(89.95 lbs)
Design life	12 years (in standby applications)	
Terminal	M8	
Container Material	ABS	
Rated Capacity	140.0Ah/7.0A	(20hr, 1.75V/Cell, 25 °C/77°F)
	127.5Ah/12.75A	(10hr, 1.80V/Cell, 25 °C/77°F)
	111.8Ah/22.36A	(5hr, 1.75V/Cell, 25 °C/77°F)
	78.2Ah/78.2A	(1hr, 1.60V/Cell, 25 °C/77°F)
Max. Discharge Current	1400A(5s)	
Internal Resistance	Appro≤4.5mΩ	
Operating Temp. Range	Discharge:	-20 °C~50 °C
	Charge:	0 °C~40 °C
	Storage:	-20 °C~50 °C
Nominal Operating Temp. Range	25±3 °C(77±5°F )	
Cycle Use	Initial Charging Current Less than 24.3 A. Voltage 14.4V-15.0V at 25 °C(77°F ) Temp. Coefficient-20mV/C	
Standby Use	No limit on Intital Charging Current Voltage 13.5V-13.8V at 25 °C(77°F ) Temp. Coefficient-20mV/C	
Capacity affected by Temperature	40 °C( 104°F )	103%
	25 °C( 77°F )	100%
	0 °C( 32°F )	86%
Self Discharge	EDC series batteries may be stored for up to 6 months at25 °C(77°F ) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



### Application

- ◆ All purpose
- ◆ Uninterruptable Power Supply(UPS)
- ◆ Electric Power System(EPS)
- ◆ Emergency backup power supply
- ◆ Emergency light
- ◆ Railway signal
- ◆ Aircraft signal
- ◆ Alarm and securitysystem
- ◆ Electronic apparatus & equipment
- ◆ Communication power supply
- ◆ DC power supply
- ◆ Auto controlsystem

### Constant Current Discharge (Amperes) at 25 °C ( 77F )


F.V/Time	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h	100h
<b>1.60V</b>	173.7	111.0	81.5	75.1	47.7	33.5	22.7	15.0	13.37	7.16	1.62
<b>1.67V</b>	170.6	108.9	80.1	73.6	46.7	32.8	22.3	14.7	13.10	7.02	1.59
<b>1.70V</b>	167.4	106.9	78.6	72.2	45.9	32.3	21.9	14.4	12.83	6.89	1.55
<b>1.75V</b>	164.3	104.9	77.1	70.9	45.0	31.6	21.5	14.2	12.69	6.75	1.53
<b>1.80V</b>	158.0	100.8	74.1	68.2	43.2	30.4	20.7	13.6	12.29	6.68	1.50

### Constant Power Discharge (Watts) at 25 °C ( 77F )


F.V/Time	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h	100h
<b>1.60V</b>	334.4	213.6	157.0	144.0	91.5	64.3	43.7	28.8	25.8	14.0	3.12
<b>1.67V</b>	328.3	209.7	154.0	141.5	89.9	63.2	42.9	28.4	25.2	13.7	3.05
<b>1.70V</b>	322.2	205.7	151.2	138.8	88.3	62.0	42.1	27.8	24.8	13.6	3.00
<b>1.75V</b>	316.2	201.8	148.4	136.2	86.5	60.8	41.3	27.3	24.3	13.4	2.94
<b>1.80V</b>	304.0	194.1	142.7	131.0	83.3	58.5	39.8	26.2	23.4	13.0	2.89

## EDC12-135 (12V 140Ah)


### Dimensions

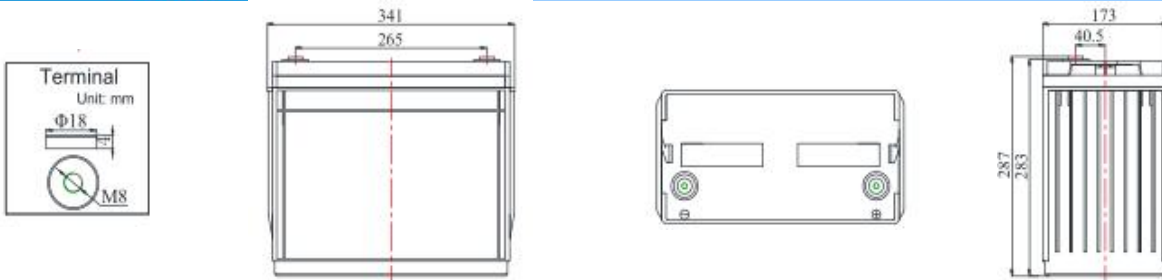


### Discharge Characteristics

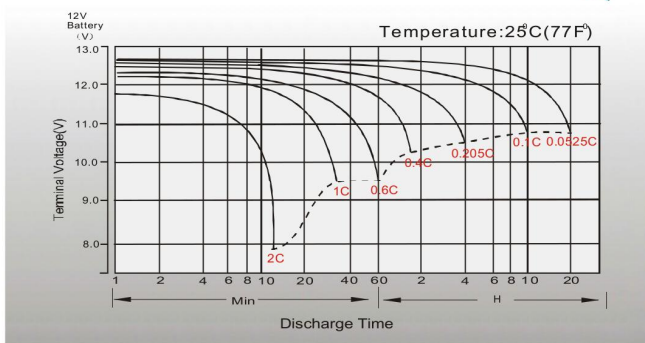


### Float Charging Characteristics

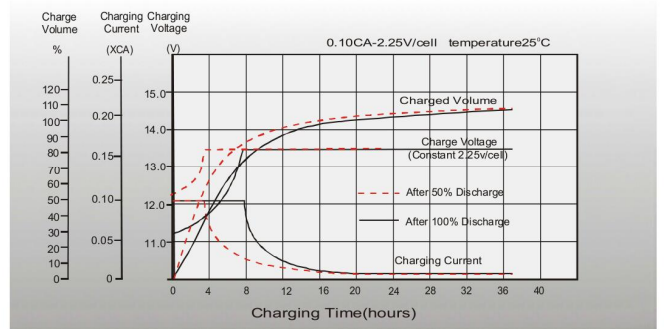


### Temperature Effects in Relation to Battery Capacity

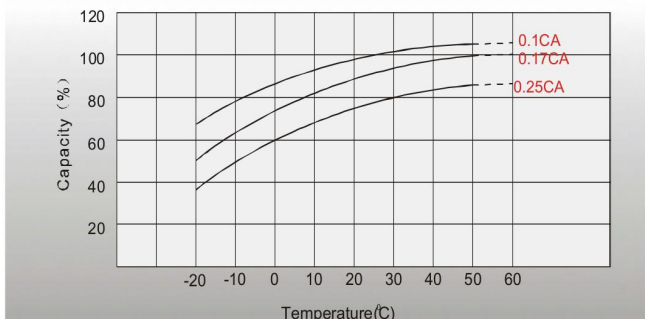


### Effect of Temperature on Long Term Float Life

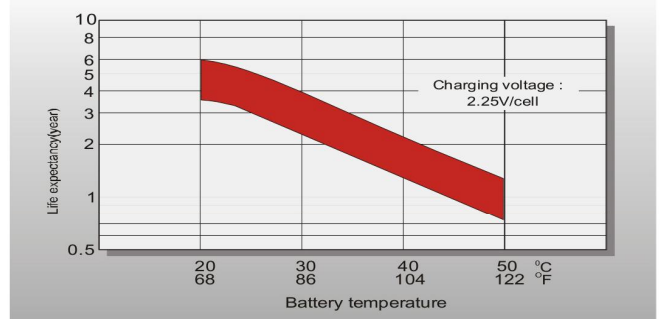

### Cycle life in Relation to Depth of Discharge

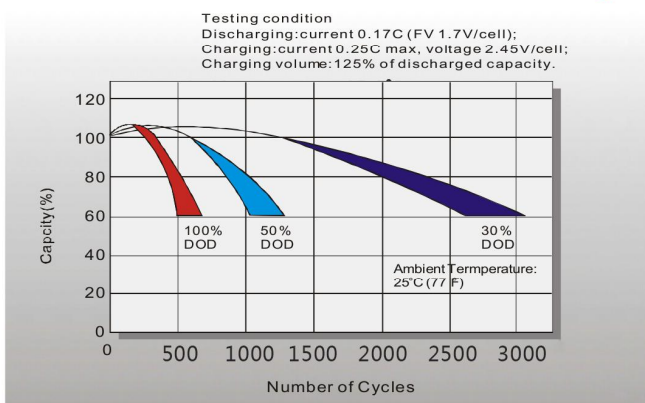

### Self-discharge Characteristics

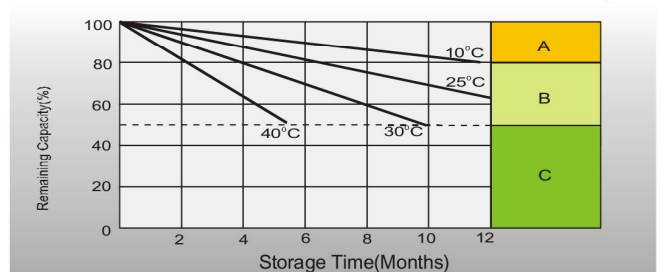

- A** No supplementary charge required. (Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:  
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.  
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.  
3. Charged for 8-10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this is reached.

Specifications subject to change without prior notice.