

KBG12400 12V 40Ah (C₁₀)



Gel battery shows some distinctive advantages over flooded battery or AGM battery, such as super thermal stability, high deep discharge capability, good recovery from deep discharge, even if the battery is left discharged for three days, it will recover to 100% of capacity. With the above-mentioned advantages, the gel battery has long service life, specially suitable for motive power applications, such as golf trailer, scrubber, forklift, etc. The deep discharge cycles increased 50% as compared with the AGM battery.


Performance Characteristics

Nominal Voltage	12V	
Design Life	12 years	
Dimensions	Length (mm / inch)	197 / 7.76
	Width (mm / inch)	165 / 6.50
	Height (mm / inch)	170 / 6.69
	Total Height (mm / inch)	170 / 6.69
Approx. Weight	(Kg / lbs) 13.5 / 29.8	
Terminal	M6	
Container Material	ABS	
Rated Capacity	42.8Ah / 4.28A	(10hr, 1.70V / cell, 25°C / 77°F)
	37.8Ah / 7.56A	(5hr, 1.70V / cell, 25°C / 77°F)
	24.4Ah / 24.4A	(1hr, 1.70V / cell, 25°C / 77°F)
Max. Discharge Current	500A (5s)	
Internal Resistance	Approx 9.0mΩ	
Operating Temp. Range	Discharge : -20 ~ 60°C (-4 ~ 140°F)	
	Charge : -10 ~ 60°C (14 ~ 140°F)	
	Storage : -20 ~ 60°C (-4 ~ 140°F)	
Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)	
Cycle Use	Cycle Use Maximum charging current 8A	
	Voltage: 14.1V ~ 14.4V at 25°C (77°F)	
	Temp. Coefficient: -20mV/°C	
Standby Use	Maximum charging current 8A	
	13.5V ~ 13.8V at 25°C (77°F)	
	Temp. Coefficient: -30mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	Fully charged Kaise Gel Series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

Discharge Constant Current (Amperes) at 77°F (25°C)

Volts/cell	10min	15min	30min	1h	3h	5h	10h	20h
1.80V	68.0	53.8	37.8	22.3	9.80	7.14	4.20	2.21
1.75V	73.1	58.8	39.5	23.5	10.2	7.39	4.24	2.25
1.70V	78.1	63.8	40.3	24.4	10.4	7.56	4.28	2.27
1.65V	83.2	67.2	41.2	25.2	10.6	7.73	4.37	2.31
1.60V	88.2	72.2	42.0	26.0	10.9	7.98	4.41	2.35

Dimensions and Terminal (Unit: mm (inches))

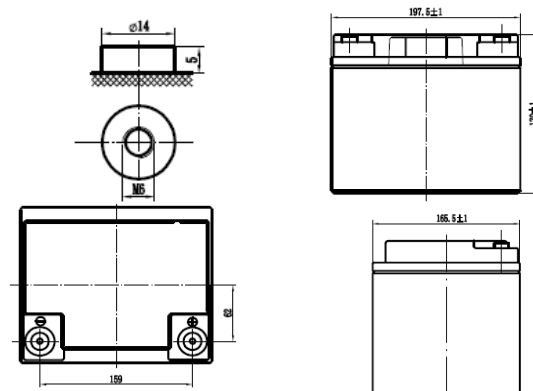

Applications

Wind and solar energy systems
 Cable TV systems
 Telecommunications
 Electric wheel chairs
 Military equipment
 Emergency lighting
 Power plants
 Medical equipment
 Golf carts

Certifications

ISO 9001:2008 ISO 14001:2008



Discharge End Voltage vs. Discharge Current


Final discharge voltage V/CELL	1.8	1.75	1.7	1.6
Discharge current (A)	I ≤ 0.1CA	0.25CA ≥ I > 0.1CA	0.55CA ≥ I > 0.25CA	I > 0.55CA

Discharge Constant Power (Watts per cell) at 77°F (25°C)


Volts/cell	10min	15min	30min	1h	3h	5h	10h	20h
1.80V	126	103	66.5	41.0	16.5	12.6	6.85	3.88
1.75V	133	109	69.5	42.9	17.5	13.5	7.33	4.03
1.70V	140	116	71.6	44.4	18.4	13.8	7.61	4.17
1.65V	144	121	75.1	46.4	19.4	14.5	7.90	4.36
1.60V	151	123	78.6	48.7	20.4	15.3	8.54	4.63

(Note) The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.


Discharge Characteristics

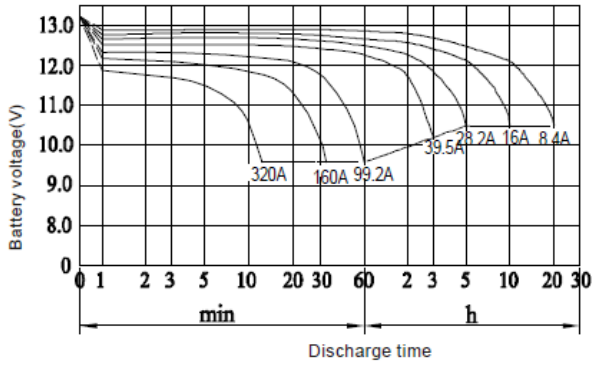


Charging Characteristics (cycle use)

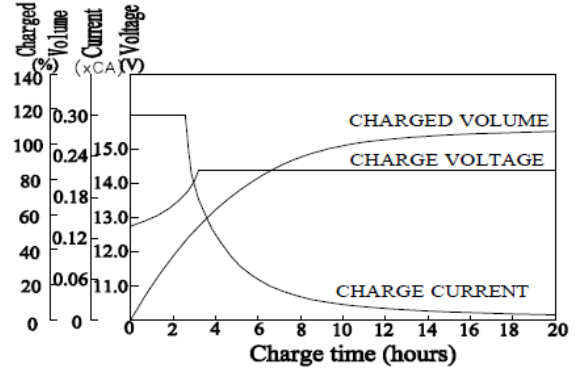


Temperature Effects in Relation to Battery Capacity

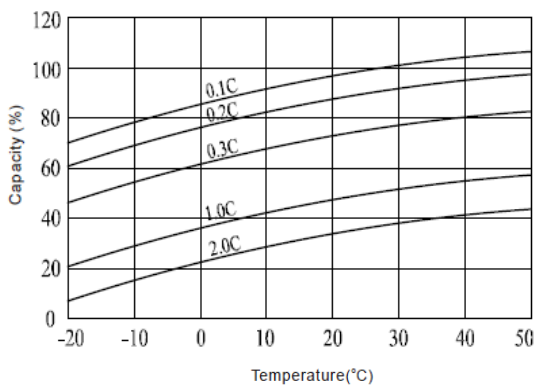

Cycle Life in Relation to Depth of Discharge

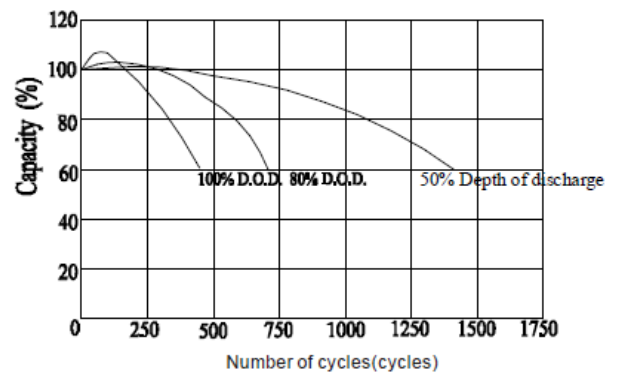

Self Discharge Characteristics

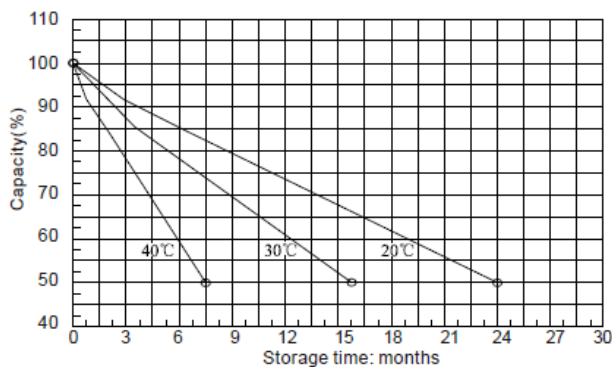

IMPORTANT NOTE: The specifications presented herein are subject to revision without notice.