

ZGL120024

Zenith



CHARACTERISTIC / CARATTERISTICHE	
Volt	12V
Capacity / Capacità	20h 5Ah
	5h 4.45Ah
Internal Resistance	Full Charged Battery 25°C ≤32mΩ
Capacity affected by Temperature / Effetti delle temperature sulla capacità	40°C 102%
	25°C 100%
	0°C 85%
	-15° 65%
Self-Discharge 25°C Capacity / Autoscarica a 25°C	after 3 month storage 90%
	after 6 month storage 80%
	after 12 month storage 62%
Charge (Costant Voltage 25°C)	Float Volt 13.6 - 13.8V
	Charge Max. 0.6Amp. 14.4 - 15.0 Volt

CHARACTERISTIC / CARATTERISTICHE			
Battery dimensions / Dimensioni batteria			
L/L	W/P	H/A	Tot - H/A
90	70	101	107
Box Dimensions / Dimensioni scatola			
L/L	W/P	H/A	
389	200	147	
Weight / Peso		1.54Kg	
Terminal / Terminali		F1	
Case / Contenitore		ABS	

Amp. (25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	14.85	9.90	7.45	4.95	3.47	2.97	1.86	1.27	0.85	0.57	0.47	0.25
1.65V	14.58	9.72	7.31	4.86	3.40	2.92	1.82	1.25	0.83	0.56	0.46	0.24
1.70V	14.31	9.54	7.18	4.77	3.34	2.86	1.79	1.23	0.82	0.55	0.45	0.24
1.75V	14.04	9.36	7.04	4.68	3.28	2.81	1.76	1.20	0.80	0.54	0.45	0.23
1.80V	13.50	9.00	6.77	4.50	3.15	2.70	1.69	1.16	0.77	0.52	0.43	0.23



Watts (25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	28.59	19.06	14.34	9.53	6.67	5.72	3.57	2.45	1.63	1.10	0.91	0.48
1.65V	28.07	18.71	14.08	9.36	6.55	5.61	3.51	2.40	1.60	1.08	0.89	0.47
1.70V	27.55	18.36	13.82	9.18	6.43	5.51	3.44	2.36	1.57	1.06	0.87	0.46
1.75V	27.03	18.02	13.56	9.01	6.31	5.41	3.38	2.32	1.54	1.04	0.86	0.45
1.80V	25.99	17.33	13.04	8.66	6.06	5.20	3.25	2.23	1.48	1.00	0.82	0.43


This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact U.B.S. UNION BATTERY SERVICE for the latest information.

Le informazioni contenute in questa scheda tecnica sono solo descrittive e indicative, non sono una garanzia. U.B.S. UNION BATTERY SERVICE si riserva il diritto di aggiornarle/modificarle senza preavviso.




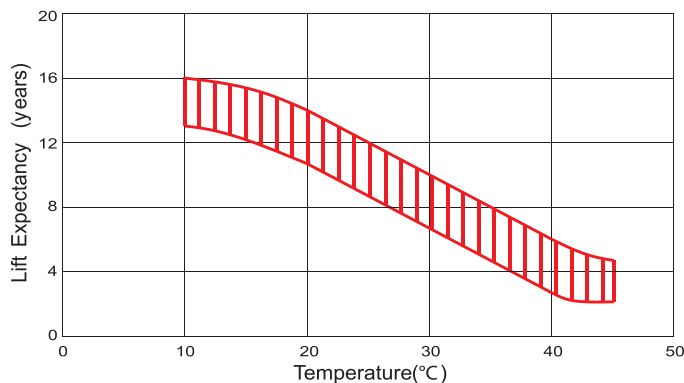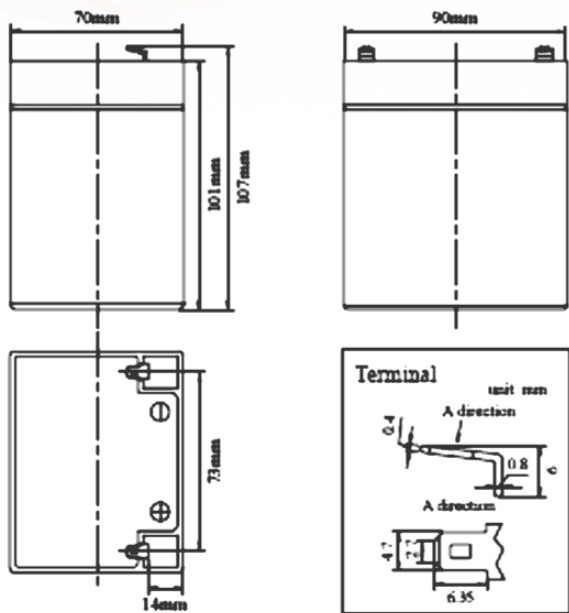


Charging characteristics

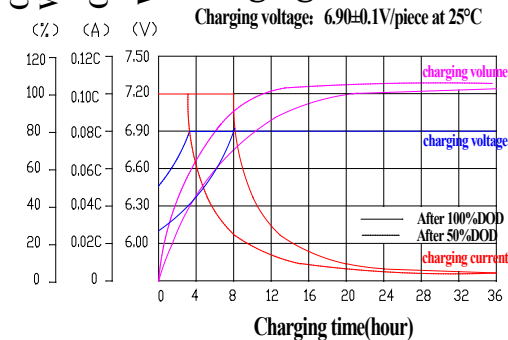

Temperature effect on battery self-discharge

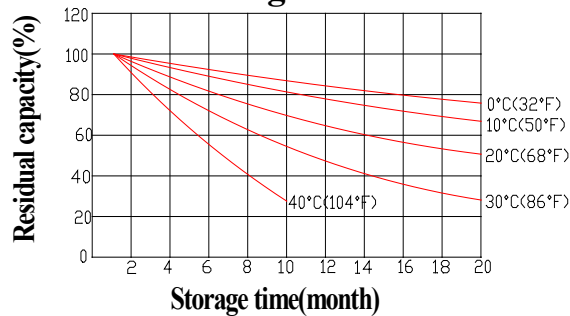

Discharge characteristics (25°C)

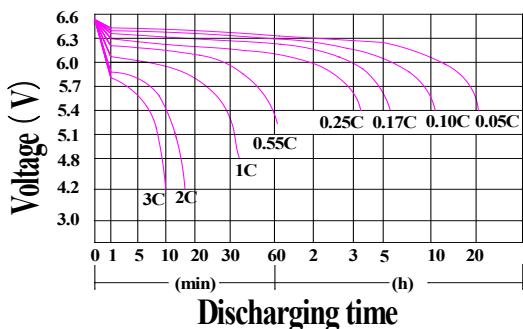

Temperature effect on capacity

