

ZGL120042



CHARACTERISTIC / CARATTERISTICHE	
Volt	12V
Capacity / Capacità	20h 26Ah
	5h 24Ah
Internal Resistance	Full Charged Battery 25°C ≤12mΩ
Capacity affected by Temperature / Effetti delle temperature sulla capacità	40°C 102%
	25°C 100%
	0°C 85%
	-15° 65%
Self-Discharge 25°C Capacity / Autoscarica a 25°C	after 3 month storage 90%
	after 6 month storage 80%
	after 12 month storage 62%
Charge (Costant Voltage 25°C)	Float Volt 13.6 - 13.8V
	Charge Max.9.6Amp. 14.4 - 15 Volt

CHARACTERISTIC / CARATTERISTICHE			
Battery dimensions / Dimensioni batteria			
L/L	W/P	H/A	Tot - H/A
165	176	125	125
Box Dimensions / Dimensioni scatola			
L/L	W/P	H/A	
-	-	-	
Weight / Peso		8.20Kg	
Terminal / Terminali		M6	
Case / Contenitore		ABS	


Amp. (25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	95.0	64.0	48.0	28.5		16.0		6.74	4.47		2.52	1.24
1.65V	90.1	60.9	45.9	27.4		15.4		6.53	4.36		2.47	1.23
1.70V	84.9	57.8	43.7	26.2		14.8		6.30	4.24		2.42	1.22
1.75V	79.7	54.5	41.1	24.9		14.2		6.05	4.10		2.37	1.20
1.80V	74.3	51.3	39.1	23.6		13.5		5.78	3.95		2.31	1.18

Watts (25°C)


F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	185	121	90.0	55.0	40.0	31.7	19.6	13.4	8.54			
1.65V	173	114	85.1	52.3	38.2	30.3	19.0	13.1	8.39			
1.70V	161	107	80.2	49.4	36.3	28.9	18.3	12.5	8.22			
1.75V	151	99.7	75.2	46.6	34.3	27.5	17.6	12.0	8.03			
1.80V	139	92.7	70.3	43.7	32.3	26.0	16.9	11.4	7.83			

ZGL120042

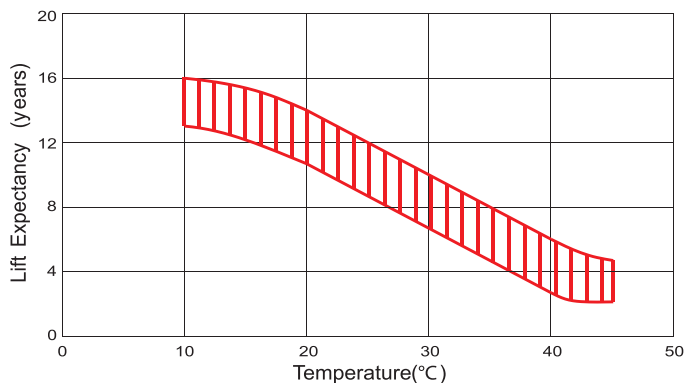


Charging characteristics


Charging voltage: 6.90±0.1V/piece at 25°C

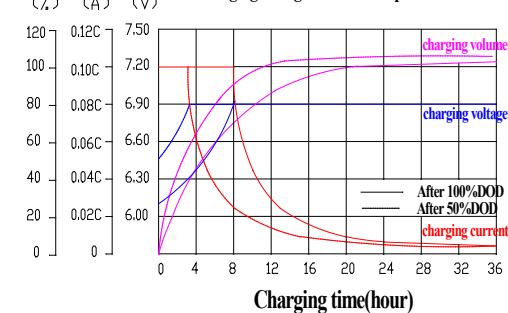

Temperature effect on battery self-discharge

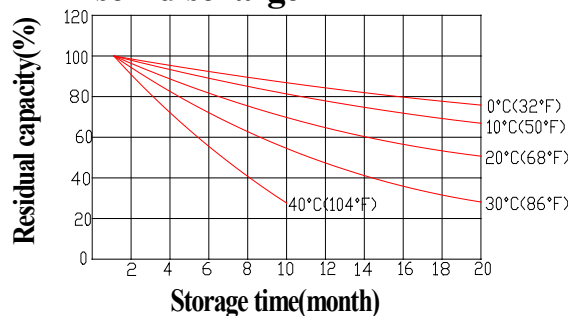

Discharge characteristics (25°C)

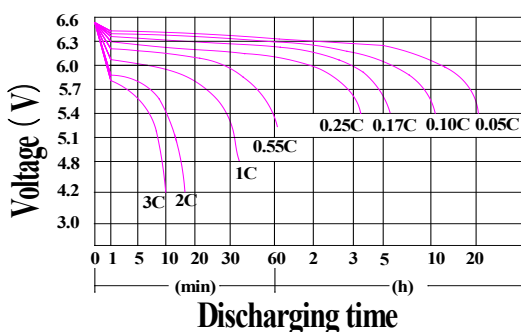

Temperature effect on capacity

