


BATTERIA SIGILLATA AGM DEEP-CYCLE (USO CICLICO)
DEEP-CYCLE AGM MAINTENANCE FREE BATTERY

ZL120130



CHARACTERISTIC / CARATTERISTICHE	
Volt	12V
Capacity / Capacità	20h 26Ah
	10h 24Ah
	5h 22Ah
	2h 19Ah
Internal Resistance	Full Charged Battery 25°C ≤12mΩ
Capacity affected by Temperature / Effetti delle temperature sulla capacità	40°C 102%
	25°C 100%
	0°C 70%
Self-Discharge 25°C Capacity / Autoscarica a 25°C	after 3 month storage 90%
	after 6 month storage 80%
	after 12 month storage 62%
Charge cycle / Ciclo di carica	IU + h "In" max. 5.6Amp; "V1" 2.43V/cell
	IUIa

CHARACTERISTIC / CARATTERISTICHE			
Battery dimensions / Dimensioni batteria			
L/L	W/P	H/A	Tot - H/A
165	174	125	125
Box Dimensions / Dimensioni scatola			
L/L	W/P	H/A	
212	180	220	
Weight / Peso		8,4 Kg	
Terminal / Terminali		M6	
Case / Contenitore		ABS	
Pallet Qt		80	

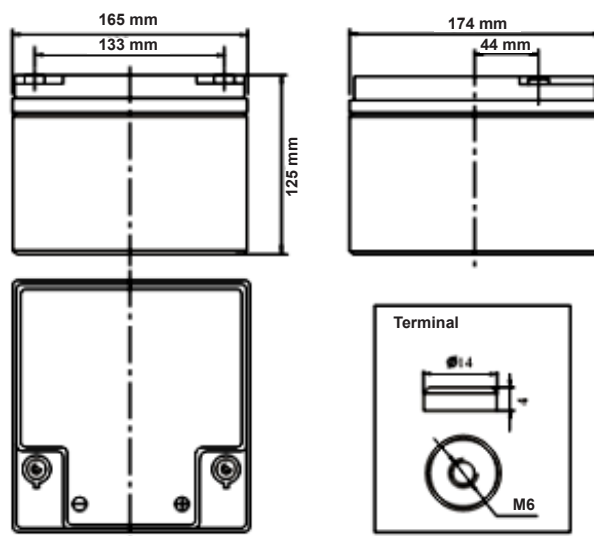

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact U.B.S. UNION BATTERY SERVICE for the latest information.

Le informazioni contenute in questa scheda tecnica sono solo descrittive e indicative, non sono una garanzia. U.B.S. UNION BATTERY SERVICE si riserva il diritto di aggiornarle/modificarle senza preavviso.




www.unionbatteryservice.it

BATTERIA SIGILLATA AGM DEEP-CYCLE (USO CICLICO)
DEEP-CYCLE AGM MAINTENANCE FREE BATTERY


ZL120130




Charge Cycles (25°C)

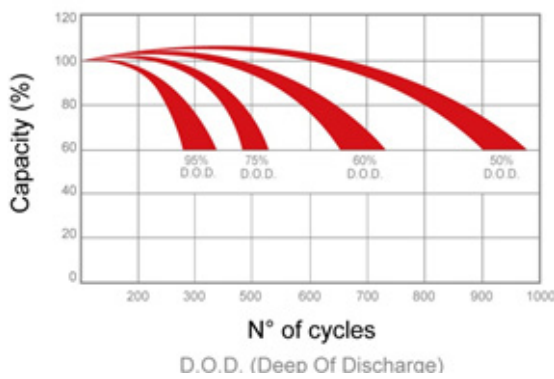

Temperature effect on capacity

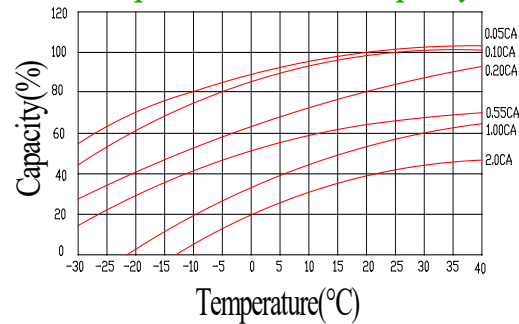

Charge cycle for sealed batteries (GEL/AGM): IU + holding

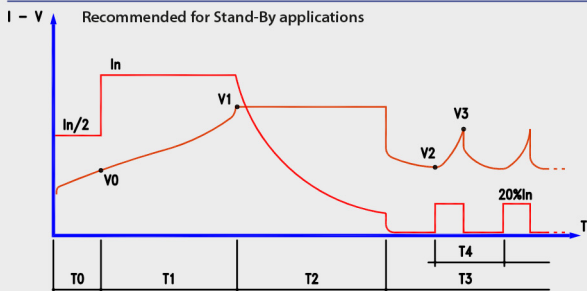

- I_n = PROGRAMMED CAPACITY/10
- V_0 = 1,90 V/CELL
- V_1 = PROGRAMMED VALUE
- V_2 = 2.10 V/CELL
- V_3 = 2.30 V/CELL
- T_0 = MAX. 1 HR
- T_1 = MAX. 12 HRS
- T_2 = T_1 (MIN. 2-MAX. 5 HRS)
- T_3 = UNLIMITED